

PODIUM WHEEL RIM NASCAR®



Quick Guide



The NASCAR identifications and logos are trademarks, copyrighted designs, and other forms of intellectual property of the National Association for Stock Car Auto Racing, Inc.


Fanatec® is a registered trademark of Endor AG

Designed and developed by Endor AG in Germany

Made in China



PACKAGE CONTENTS

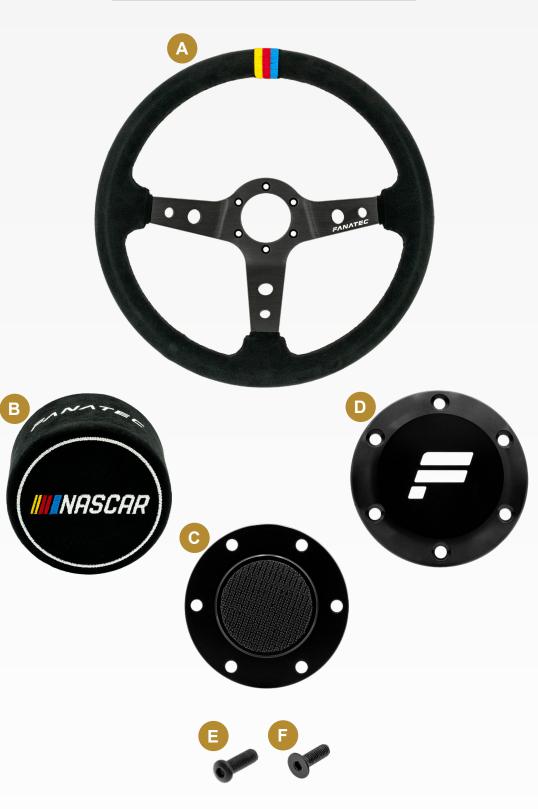

- NASCAR® Wheel Rim (A)
- NASCAR® Soft Hub Cover with preinstalled Velcro (B)
- Adapter plate with preinstalled Velcro (C)
- Metal Hub Cover (D)
- •6x M5x16mm hexagon button head cap bolt (E)
- 6x M5x16mm hexagon countersunk bolt (F)

PODIUM

ATTACHING THE WHEEL RIM WITH SOFT HUB COVER







 Align the Velcro adapter Plate (C) on the FANATEC® Hub.



 Place the Wheel Rim (A) on top and insert the 6 countersunk bolts (F) into the mounting holes and tighten them equally.



NOTE: Use the bolts included with a max. torque of 2 Nm on your Wheel Rim.

III INASCAR

 Align the Soft Hub Cover (B) with the Velcro on the adapter plate (C) and press firmly to connect the two parts.

NOTE: The position and mounting of the Button Clusters on your Fanatec Hub depends on your personal preference. Please read the Manual of your Universal Hub for Xbox One or Podium Hub for more information.

1.

DETACHING THE WHEEL RIM WITH SOFT HUB COVER

• To detach the Soft Hub Cover (B), twist the Soft Hub Cover slightly whilst pulling it away from the adapter plate (C).





 Loosen the bolts (F) and remove the Wheel Rim and the adapter plate(C) from your Fanatec Hub.





ATTACHING THE WHEEL RIM WITH METAL HUB COVER

PODIUM





• Align the Wheel Rim (A) to the Fanatec Hub.

NOTE: Use the bolts included with a max. torque of 2 Nm on your Wheel Rim.



• Place the metal hub cover (D) on top and insert the 6 button head cap bolts (E) into the mounting holes and tighten them equally.



NOTE: The position and mounting of the Button Clusters on your Fanatec Hub depends on your personal preference. Please read the Manual of your Universal **Hub for Xbox One or Podium Hub for more information.**

DETACHING THE WHEEL RIM WITH METAL HUB COVER



 Loosen the bolts and remove the Wheel Rim and the Metal Hub Cover (D) from your Fanatec Hub.



STORAGE

To prevent damage or pressure marks on your Wheel Rim, we recommend resting it on the hub and not on the rim grip.





If it is still installed on your Fanatec Hub, use the Quick Release storage pin to prevent wear on the mechanism during long term storage.



USAGE

Because of the possibility of increased wear-and-tear, Fanatec cannot give a general recommendation to use gloves.

CLEANING

Clean only with a dry or slightly damp cloth. Using cleaning solutions may damage your NASCAR® Wheel Rim.

TRADEMARKS

"NASCAR®" is a registered trademark of the National **Association for Stock Car Auto Racing, Inc. All rights** reserved.

"Fanatec" and "Endor" are registered trademarks of Endor AG/Germany. All rights reserved.

All other trademarks are the properties of their respective owners.